


Product Information



Filter Frame Bonding

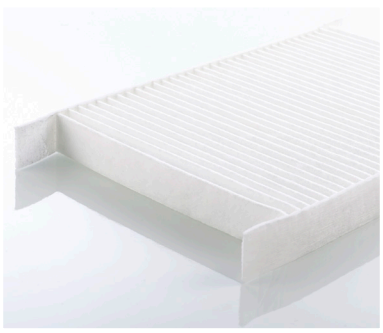

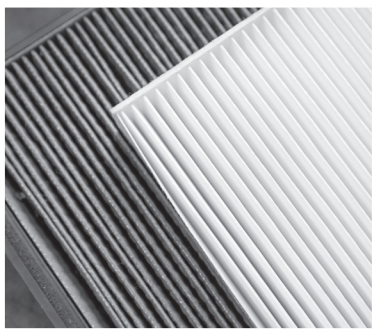

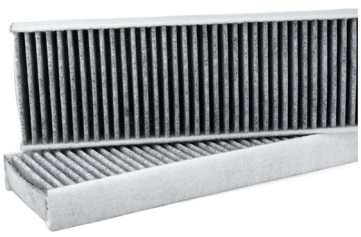



Powerful adhesives for frame bonding of automotive and building filters

- Very high heat resistance
- Low fogging and emission values
- Flexible and facilitating reliable processes

Jowat Adhesives

Powerful Adhesives for Frame Bonding of Automotive and Building Filters

Adhesives from Jowat keep filters in shape and remain flexible throughout the entire life of the filter. Even when the composite material is exposed to mechanical stress or high temperatures.
Jowatherm® PO adhesives for filter frame bonding are characterized especially by their technical properties adapted to the manufacturing speed.

Benefits
- Long open time
- Good green strength, fast downline processing
- Very high flexibility
- Very good oxidation stability and colorfastness in the melt

Jowatherm® PO Hot melt adhesive for Filter Frame Bonding

Jowatherm® PO	**262.95**	**263.25**	**263.17**
Based on	PO	PO	PO
Processing temperature	140–160°C	180–200°C	180–200°C
Appearance	colorless, opaque	colorless	whitish
Viscosity	~8.400 at 150°C	~26.000 at 190°C	~41.000 at 190°C
Open time	~42s	~75s	~20s

The information given in this leaflet is based on test results from our laboratories as well as on experience gained in the field, and does in no way constitute any guarantee of properties. Due to the wide variety of different applications, substrates, and processing methods that are beyond our control, no liability may be derived from these indications nor from the information provided by our free technical advisory service. Before processing, please request the corresponding data sheet and observe the information in it. Customer trials under everyday conditions, testing for suitability in normal processing conditions, and appropriate fit-for-purpose testing are absolutely necessary. For the specifications and for further information, please refer to the latest technical data sheets.